


# MK 17 AF

## Balanced Diaphragm

### First Stage Regulator

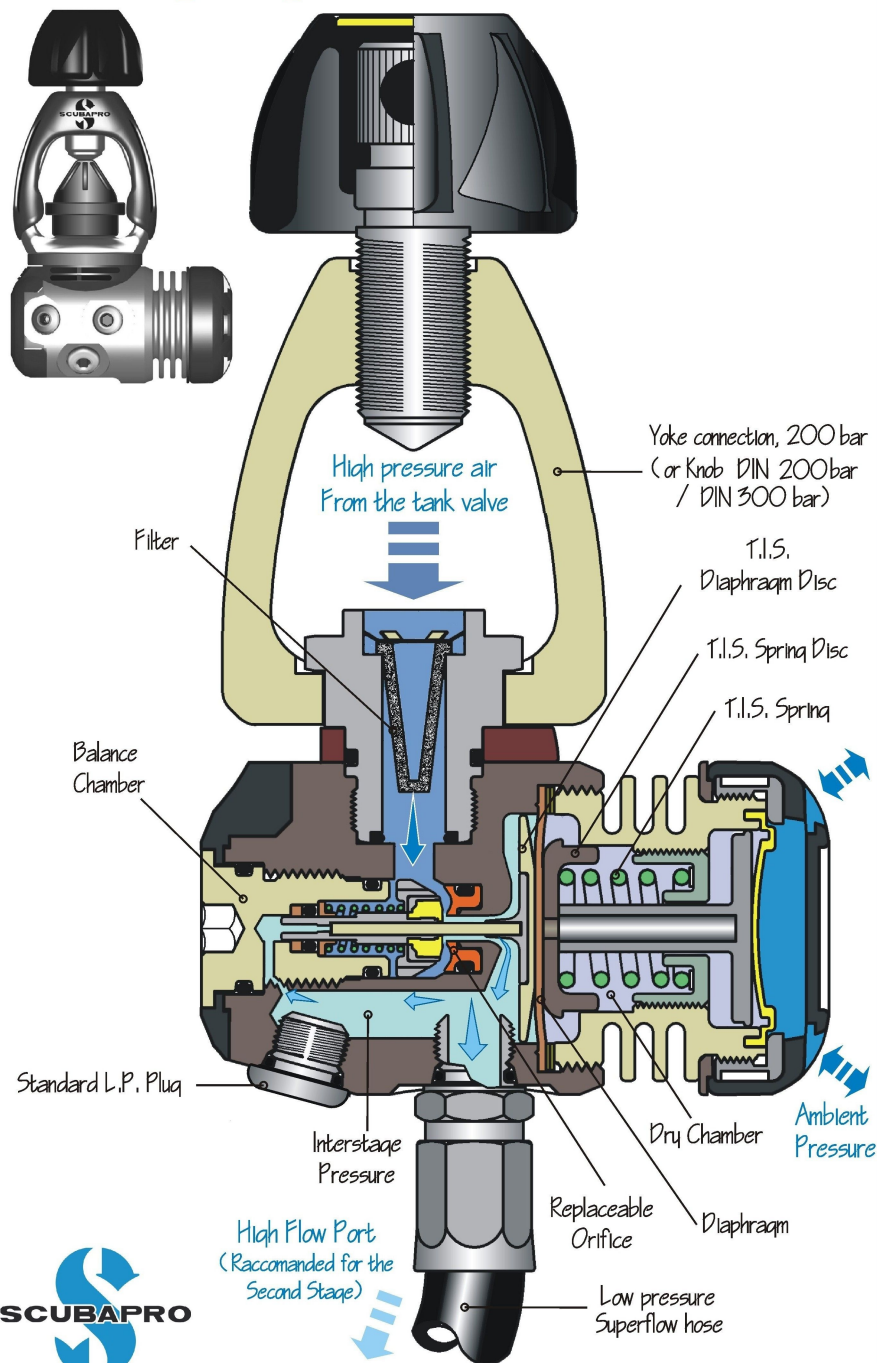

4350 psi (300 bar) Max  
Working Pressure

Intermediate Pressure  
Inversion

Dry Chamber

2 HFP High Flow LP Ports

#### MK17 AF FIRST STAGE SPECIFICATIONS

##### Materials

Body	Brass, Satin Chrome Finish
Yoke	Forged Brass
Co-molded HP poppet	Brass / High-Tensile Technopolymer
Orifice	AISI 316 Stainless Steel
Spring	Stainless Steel, T.I.S. Coated

Number of High Pressure Ports..... Two

Number of Low Pressure Ports..... Four

Weight (INT)..... 30 ounces (850 grams)

Weight (DIN200)..... 21.5 ounces (610 grams)

HP Valve Design..... Conical

Protection Cap..... Elastomer, DIN/Standard

Intermediate pressure 130-142 psi (9-9.8 bar)

Flow at 3000 psi (206 bars)..... 230 SCFM  
(6500 litres per minute)